



AC-PD-INT Flip-Up Power + Data Module, international

Product Description and features:

Configurations include:

- (2) Electrical outlets
- (2) RJ45, Cat 6 data jacks

- (2) Electrical outlets
- (1) Charging USB
- (1) RJ45, Cat 6 data jack



- (2) Electrical outlets
- (1) Passive USB
- (1) RJ45, Cat 6 data jack

Overall: 14 - 5/16" x 5 - 5/16", Cut Out: 13 - 13/16" x 4 - 13/16"

1800 mm. electrical cord

Finish: Silver Aluminum

Certifications vary by country

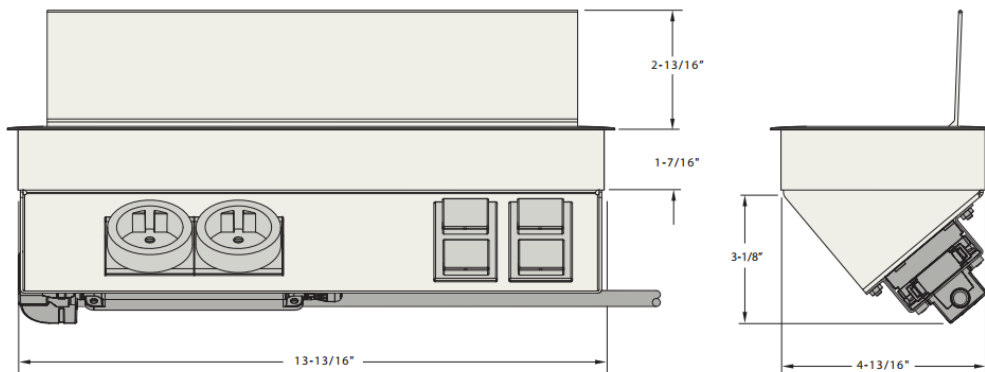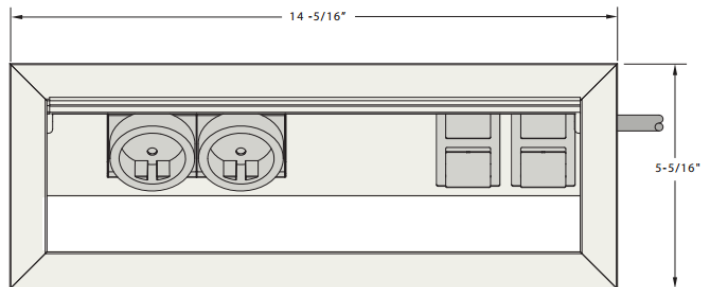



AC-PD-INT Flip-Up Power + Data Module, international

International Designation*	Byrne Socket Designation**	Style	Nickname	Standard	Primary Usage	Socket Rating	System Rating (Harness Size)	Available Keyway	Core & Plug Rating and Size	Certification	Byrne Available
N	A		Brazil (Euro)	ABNT NBR NM760884-1	Brazil	10A, 250V~, IP4X	16A, 250V~, IP4X (1.5mm)	A, B	10A, 250V~, 1.5mm	Inmetro (UL Brazil)	Yes
C	J		2 Pin Euro	CEE 7/16 - IEC60906-1 - NBR14136	Europe	N/A	N/A	A, B	10A, 250V~, 1.0mm	Inmetro	Cordset only no Socket
I	C		Argentina	IRAM 2071	Argentina	16A, 250V~, IP4X	16A, 250V~, IP4X (1.5mm)	A, B	10A, 250V~, 1.5mm	IRAM (Intertek)	Yes
I	D		China	GB 2099.1 / GB 1002	China	10A, 250V~, IP4X	16A, 250V~, IP4X (1.5mm)	A, B	10A, 250V~, 1.0mm	CCC	Yes
-	-		China Combo	GB 2099.1 / GB 1002	China	10A, 250V~, IP4X	16A, 250V~, IP4X (1.5mm)	A, B	10A, 250V~, 1.0mm	CCC	Yes
F	B		Schuko	DIN VDE 0620-1 / DIN 49440-1 or IEC 60884 1:2002	Europe	16A, 250V~, IP4X	16A, 250V~, IP4X (1.5mm)	A, B	16A, 250V~, 1.5mm	Demko (UL)	Yes
F	B		Schuko	DIN VDE 0620-1 / DIN 49440-1 or IEC 60884 1:2002	Europe	16A, 250V~, IP4X	16A, 250V~, IP4X (1.5mm)	A, B	16A, 250V~, 1.5mm	Demko (UL)	Yes
G	E		UK	BS 1363 / ASTA Diamond / BS5733:2010	United Kingdom / Ireland	13A, 250V~, IP4X	16A, 250V~, IP4X (1.5mm)	A, B	13A, 250V~, 1.0mm	ASTA (Intertek)	Yes
D	F		India	BS 546	India / South Africa	16A, 250V~, IP4X	16A, 250V~, IP4X (1.5mm)	A, B	16A, 250V~, 1.5mm	Pending	Yes
E	-		France / Belgium	CEE 7/7	France / Belgium	-	-	-	-	-	No
I	G		Australia	AS/NZS 3112	Australia	10A, 250V~, IP4X	20A, 250V~, IP4X (2.5mm)	C, D	10A, 250V, 1.5mm	AS/NSZ 3112:2011 A1; AS/NZS 3133:2008 A1-2	Yes
M	-		S. Africa	BS 546	S. Africa	-	-	-	-	-	No
L	H		Italy	CEI 23-560 / ED 2	Italy	16A, 250V~, IP4X	16A, 250V~, IP4X (1.5mm)	A, B	16A, 250V~, 1.5mm	Intertek CEI 23-50:2007+V1:2008+V2:2011	Yes
A/B	L		Japan, NEMA	JIS C 8303 / PSE mark	Japan	15A / 125V	16A, 250V~, IP4X (1.5mm)	A, B	16A, 250V~, 1.5mm	JET	Yes
A/B	L		Japan, NEMA	JIS C 8303 / PSE mark	Japan	15A / 125V	16A, 250V~, IP4X (1.5mm)	A, B	16A, 250V~, 1.5mm	JET	Yes
H	-		Israel	SI 32	Israel	-	-	-	-	-	No
J	K		Swiss	SEV 1011	Switzerland	-	-	-	-	-	No
K	-		Denmark	Afsnit 107-2-D1	Denmark	-	-	-	-	-	No